

**Serie | 6, Flex induction ploča za
kuhanje, 30 cm,
PXX375FB1E**



Posebni dodatni pribor

HEZ390512 : Teppan Yaki
HEZ390522 : Roštilj ploča
HEZ394301 : Spojna letvica
HEZ9SE040 : Dodatni pribor za aparate za kuvanje

**Indukcijska ploča za kuhanje FlexInduction:
više lonaca ili veliku posudu možete po želji
položiti na fleksibilnu zonu za kuhanje.**

- **DirectSelect:** izravan, jednostavan odabir željene zone kuhanja, snage i dodatnih funkcija.
- **FlexInduction zona:** Veća fleksibilnost s kombiniranjem zona kuhanja u jednu veliku zonu za manje lonce i veliko kuhinjsko posuđe.
- **PowerBoost:** do 50% više snage za brže zagrijavanje.
- **Funkcija QuickStart:** odmah i bez odgode možete započeti i odabrati željenu razinu kuhanja za svoj lonac.
- **ReStart:** ako nešto prekupi, ploča za kuhanje će se automatski isključiti i pohraniti posljednju odabranu postavku.

Tehnički podaci

Grupa proizvoda / linija proizvoda : Vario/Domino cooking zone
cera

Ugradbeni / samostojeći : Ugradbeni

Dovod električne energije : Električan

Ukupan broj polja koja se mogu istovremeno upotrebljavati : 2

Potrebna veličina niše za ugradnju (VxŠxD) : 51 x 270 x 490-500
mm

Širina proizvoda : 306 mm

Dimenzije proizvoda : 51 x 306 x 527 mm

Dimenzije zapakiranog proizvoda (Vx ŠxD) : 110 x 370 x 573
mm

Neto težina : 7,7 kg

Bruto težina : 8,3 kg

Indikator preostale topline : Separate

Položaj komandne ploče : Sprijeda

Boja površine : , Alu, brushed

Certifikati odobrenja : AENOR, CE

Dužina kabela za napajanje : 110 cm

EAN kod : 4242002839738

Nazivni podaci električnog priključka : 3700 W

Napon : 220-240 V

Frekvencija : 60; 50 Hz



4 242002 839738

Serie | 6, Flex induction ploča za kuhanje, 30 cm, PXX375FB1E

**Indukcijska ploča za kuhanje FlexInduction:
više lonaca ili veliku posudu možete po želji
položiti na fleksibilnu zonu za kuhanje.**

Dizajn:

- Izbrušeni prednji rub, ukrasne letvice sa strane
- Za kombinaciju s drugim staklokeramičkim pločama u comfort design
- Za kombinaciju sa 60, 70, 80 ili 90 cm staklokeramičkim pločama za kuhanje

Komfor:

- 2 indukcijska polja za kuhanje, prepoznavanje veličine dna posude
- FlexInduction polje
- DirectSelect upravljanje
- Digitalni zaslon TopControl
- Elektronički programski sat s funkcijom isključivanja i opomenom za svako polje za kuhanje
Brojač vremena kuhanja
- Prikaz potrošnje energije
- QuickStart funkcija
- ReStart funkcija

Polja za kuhanje:

- Polja za kuhanje: 1 x Ø 400 mm x 210 mm, 3.3 kW (maks. snaga 3.7 kW) ali 2 x Ø 200 mm, 2.2 kW (maks. snaga 3.7 kW)
- Podešavanje snage: 17 stupnjeva

Sigurnost:

- Prepoznavanje veličine dna posude
Funkcija PowerManagement
Sigurnosno isključivanje
Dječija sigurnosna brava
- Digitalni dvostupanjski indikator preostale topline za svako polje za kuhanje
- Glavni prekidač

Brzina:


- Funkcija PowerBoost za sva polja za kuhanje

Dimenzije:

- Dimenzije (ŠxD): 306 mm x 527 mm
- Ugradbene dimenzije (VxŠxD): 51 mm x 270 mm x 490 mm
- Min. debljina radne površine: 16 mm
- Fiksni priključni kabel
- Priključni kabel 110 cm
- Priključna snaga: 3.7 KW


Serie | 6, Flex induction ploča za kuhanje, 30 cm, PXX375FB1E

measurements in mm

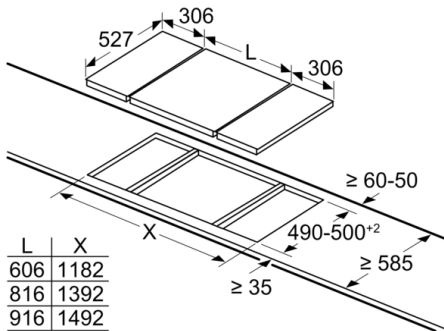


When installing two Domino units right next to a hob, two assembly kits (HEZ394301) are required.

measurements in mm

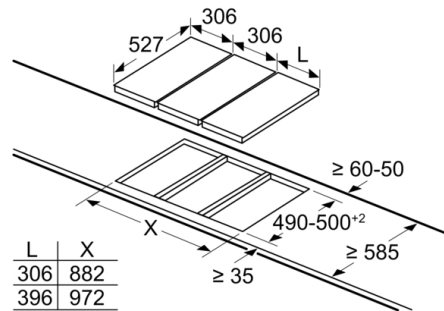

When installing two or more Domino units side-by-side, one or more assembly kits are required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc.).

measurements in mm
Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions



If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.).


Cutout dimension (X) depending on the combination see table:

Mjere u mm
Mogućnost kombiniranja Domino-a s odgovarajućim mjerama uređaja i izreza

Tip širine:
Širina uređaja:

	A	B	C	D	L	X		
2x30	306	306	-	-			612	576
1x30, 1x40	306	396	-	-			702	666
1x30, 1x60	306	606	-	-			912	876
1x30, 1x70*	306	710	-	-			1016	980
1x30, 1x80	306	816	-	-			1122	1086
1x30, 1x90	306	916	-	-			1222	1186
2x40	396	396	-	-			792	756
1x40, 1x60	396	606	-	-			1002	966
1x40, 1x70*	396	710	-	-			1106	1070
1x40, 1x80	396	816	-	-			1212	1176
1x40, 1x90	396	916	-	-			1312	1276
3x30	306	306	306	-			918	882
2x30, 1x40	306	306	396	-			1008	972
2x30, 1x60	306	306	606	-			1218	1182
2x30, 1x70*	306	306	710	-			1322	1286
2x30, 1x80	306	306	816	-			1428	1392
2x30, 1x90	306	306	916	-			1528	1492
1x30, 2x40	306	396	396	-			1098	1062
1x30, 1x40, 1x60	306	396	606	-			1308	1272
1x30, 1x40, 1x70*	306	396	710	-			1412	1376
1x30, 1x40, 1x80	306	396	816	-			1518	1482
1x30, 1x40, 1x90	306	396	916	-			1618	1582
2x40, 1x60	396	396	606	-			1398	1362
4x30	306	306	306	306			1224	1188


measurements in mm

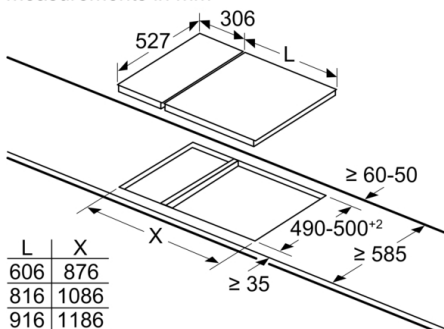

When installing a Domino unit right next to a hob, an assembly kit (HEZ394301) is required.



measurements in mm

Assembly kit (HEZ394301) for Domino

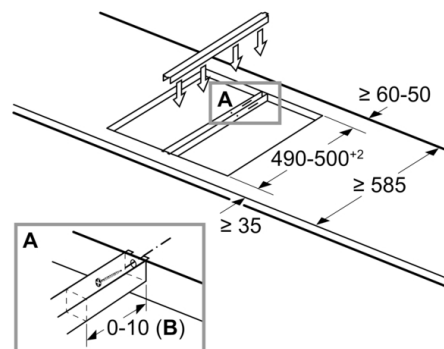


B: Dependent on the cut-out depth

Serie | 6, Flex induction ploča za kuhanje, 30 cm, PXX375FB1E

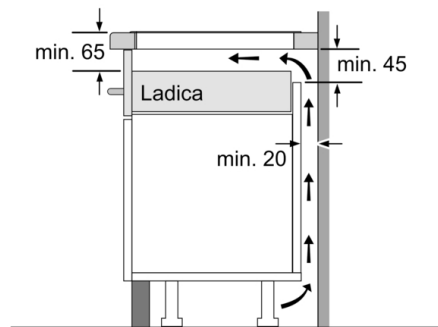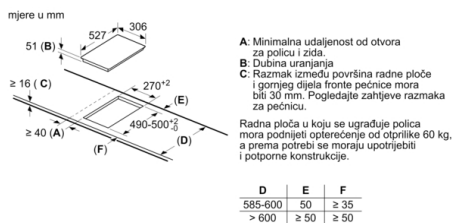


mjere u mm

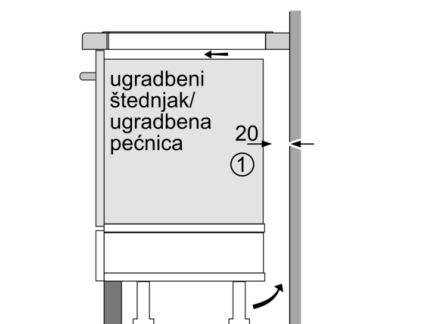


① Treba predvidjeti prerez za ventilaciju.

mjere u mm

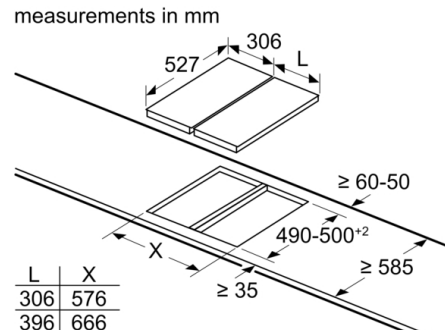

When installing two or more Domino units side-by-side, one or more assembly kits are required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc.).

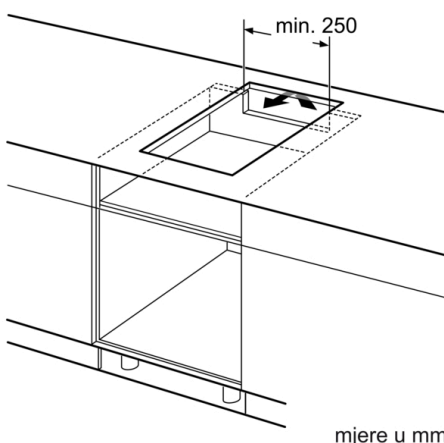

mjere u mm